



CTA 300

PALLETWRAPPER

CYKLOP[®]
GLOBAL PACKAGING SOLUTIONS


STRAPPING
WRAPPING
CODING
TAPING

With an arm wrapper, the product remains on the ground (e.g. a pallet on the ground) and the film carriage with the wrapping film on it is attached to an "arm". This arm then rotates around the product. This makes an arm wrapper suitable for light and unstable products (because the load does not rotate), but also for heavy products (because sometimes a turntable cannot handle the weight). With an arm wrapper, the heavy load remains on the ground.

The CTA 300 is an extremely robust arm wrapping machine, developed with proven technology. The machine offers the possibility to save 9 wrapping programs, the film can be changed quickly and easily and the film can be pre-stretched up to 400%. These properties guarantee optimum transport protection and a reduction in packaging material.

Cost saving

The unique "power-eco stretch" pre-stretch system can achieve pre-stretch of up to 400%. This means that 1 meter of film is stretched to 5 meters of film, which can result in cost and environmental savings of up to 75%. In this way, the CTA 300 quickly pays for itself.

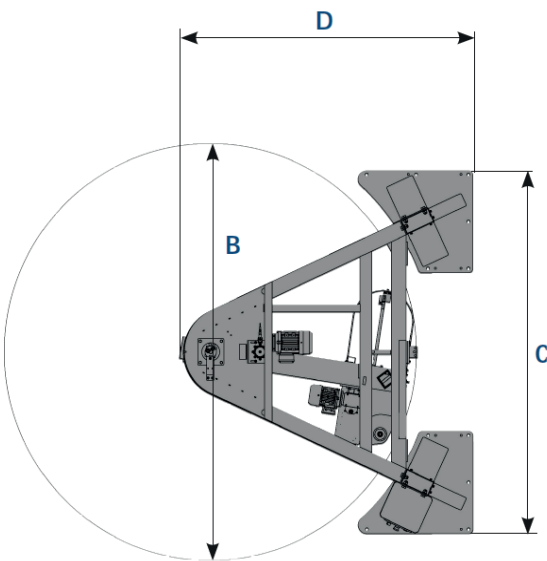

Dim (mm)	B	C	D
Standard	Ø2750	2400	1960

Technical data	
Type	Arm wrapper
Max. pallet dimensions (L x W x H)	1.200 x 1.200 x 2.400 mm
Max. pallet weight	Unlimited, depends on the floor
Wrapping speed	max. 10,5 rpm
Pre-stretch	60% - 400%
Programs	9 programs
Start / Stop	Frequency regulated
Film	Core 76 mm
	Outer diameter 250 mm
	Width 500 mm
Protection	IP54
Control	PLC
Power supply	240 V / 50 Hz / 1 phase

Cyklop UK Limited
 Unit 2, Generation Business Park
 Barford Road
 St. Neots
 Cambridgeshire
 PE19 6YQ

+44 1480 216777
 www.cyklop.co.uk
 info@cyklop.co.uk

